

# ANKAme®

PERMANENT AND TEMPORARY ROOF ANCHORS  
+ OTHER HEIGHT SAFETY EQUIPMENT

The safer,  
smarter height  
safety solution

**TEMPORARY  
& PERMANENT  
ROOF ANCHORS  
LADDER ACCESS  
BRACKETS  
+ OTHER HEIGHT  
SAFETY SOLUTIONS**

- **ALIGNS TO ROOF SCREW PATTERN AND PROFILE**
- **INDUSTRY COMPLIANT AND CERTIFIED PRODUCTS**
- **COMPLETE HEIGHT SAFETY SOLUTIONS**
- **SIMPLE INSTALLATION METHOD**
- **ADAPTS TO METAL ROOF SHEETING & CONCRETE**
- **ALL PRODUCTS CAN BE INSTALLED AND USED BY COMPETENT PERSONS**



## **Permanent Roof Anchor Adapts to**

Custom Orb, Trimdeck, Spandek, KLIP LOK 500,  
KLIP LOK 700 & Concrete Fix



**ANKAme.com.au**

## ABOUT

ANKAme is a free fall, single point arrest roof anchor designed to align to the screw profiles of the most popular metal roof sheets installed in Australia today. ANKAme can also be fixed to concrete structures and be incorporated into a variety of static line safety systems. ANKAme is also available in a permanent or temporary version suitable for a wide variety of projects working at heights.

ANKAme was formed in 2010, delivering one of the very first fully compliant roof anchor solutions to the Australian market place. The products have been specifically designed to cater to the needs of the roofing industry as well as related industries that work at heights.

The founder of ANKAme has operated within the roofing industry for over 18 years and together with his design team has manufactured a quality affordable product that caters to the specific needs of those working at heights. Of paramount concern has been the companies focus on safety, reliability and product innovation to deliver a premium product that's both user friendly and easy to install.

## CONTENT

- 2 ABOUT
- 3 INSTALL METHOD
- 4-5 PRODUCTS
- 6-7 OWNERS MANUAL
- 8 METAL ROOF PROFILES & CONCRETE FIX
- 9 COMPLIANT & CERTIFIED
- 10 CERTIFICATE OF TEST REPORT
- 11 CERTIFICATE OF COMPLIANCE
- 11 STATIC LINE USE
- 12-13 FAQs
- 14 TEMPORARY & PERMANENT ROOF ANCHOR - KEY FEATURES
- 15 TEMPORARY & PERMANENT LADDER ACCESS BRACKET - KEY FEATURES AND INSATLLATION GUIDE

Information correct as at date of publication, July 2020. Subject to change without notice.

## KEY FEATURES

- Compliant and certified products complies with all current AS/NZS
- Roof anchors for the use of Free Fall Arrest single point anchorage (15kn)
- Roof anchors can be used as a Static Line System as per owner's manual
- Comes with Fasteners, owner's manual and accessories
- Roof anchors - Light weight and durable ( 3kg )
- Ladder access bracket - Light weight and durable (1kg)
- Metal roof and concrete application, Permanent and Temporary roof anchors available.
- **Aligns to roof screw pattern and profile**
- **Temporary Roof Anchor Adapts to** Custom Orb, Trimdeck, Spandeck & Concrete Fix
- **Permanent Roof Anchor Adapts to** Custom Orb, Trimdeck, Spandeck, KLIP LOK 500, KLIP LOK 700 & Concrete Fix

## INSTALLATION METHOD

### TO INSTALL TEMPORARY FIX FOR ROOF

Remove existing roofing screws where required, ANKAme place into position as per (owner's manual installation instructions) fasten to roof with specified fastenings, to remove undo specified fastenings, remove roof anchor and replace existing screws.

### TO INSTALL TEMPORARY FIX FOR CONCRETE


Place ANKAme into position as per (owner's manual installation instructions) fasten to min. grade 32mPa concrete with specified fastenings, to remove/undo specified fastenings, and remove anchor.

### TO INSTALL PERMANENT FIX FOR ROOF


Place ANKAme into position as per (owner's manual installation instructions) fasten to roof with specified fastenings.

### TO INSTALL PERMANENT FIX FOR CONCRETE

Place ANKAme into position as per (owner's manual installation instructions) fasten to min. grade 32mPa concrete with specified fastenings.

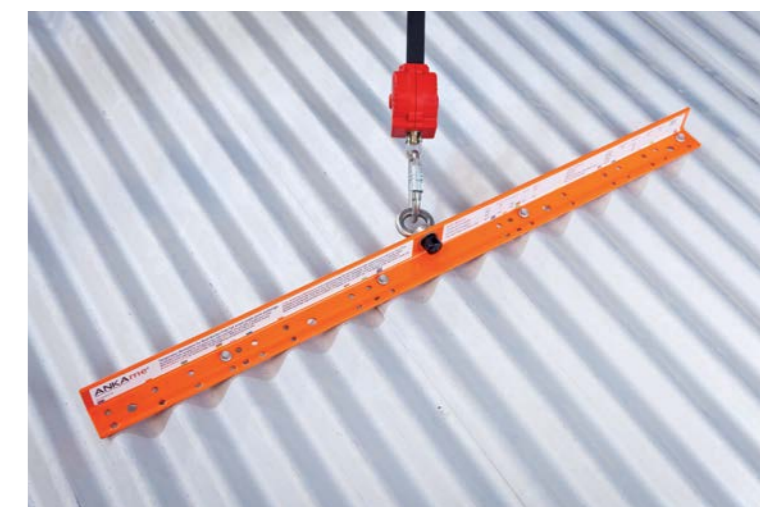

**Temporary Roof Anchor.**  
 Aligns to roof screw pattern and profile.  
 Custom Orb, Trimdeck, Spandeck & Concrete Fix.

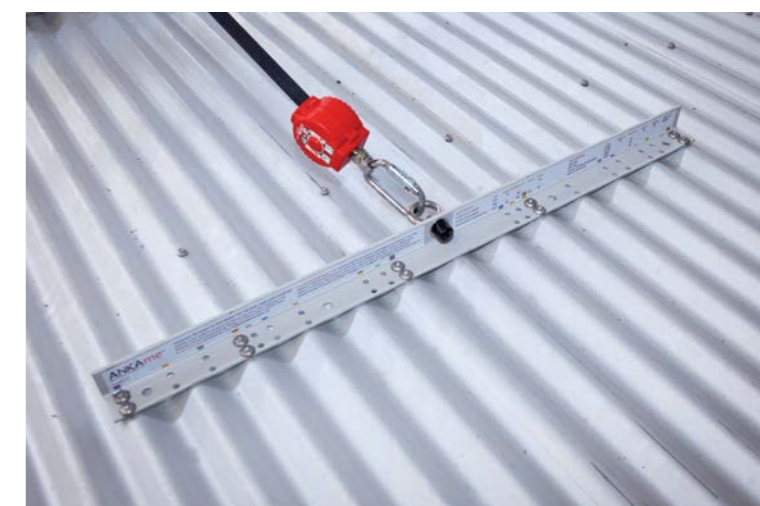

**Permanent Roof Anchor.**  
 Aligns to roof screw pattern and profile.  
 Custom Orb, Trimdeck, Spandeck, KLIP LOK 700, KLIP LOK 500 & Concrete Fix.

### TEMPORARY/PERMANENT FIX COMPLIANT & CERTIFIED ROOF ANCHORS

Surface mountable, reusable, lightweight, easy to store. All current roof anchors in Australia must now be rated to 15Kn or higher to be used as a legal roof anchor. Don't put yourself or your employees at risk with the rest, GET HOOKED UP TODAY. This roof anchor has been tested by a NATA Accredited company and complies to AS/NZS 1891.4: 2009 Single Point Anchorage (15Kn) and AS/NZS 1891.2 Supplement 1:2001 Static Line Use, tested to withstand (15Kn), approximately 1.5 tonne of force in directional load testing, use for free-fall arrest single point anchorage, for one person per anchor only. To be installed and used by competent persons only. Can be used for: Roof installations, roof maintenance, roof painting, aerial installations, solar panel installations, skylight installations, abseiling over buildings with concrete fix, roof footing, ladder footing, wall.

### DISCLAIMER

By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©



**PRODUCTS**



**PERMANENT ANCHOR**

**Includes:** Fasteners, Installers tag, Owner's manual  
**SKU: PERMRA**



**PERMANENT ANCHOR 4 - PACK**

**Includes:** Carton of 4 permanent roof anchors, Fasteners, Carry bags, Owner's manual  
**SKU: PERMRA**



**TEMPORARY ANCHOR**

**Includes:** Fasteners, Owner's manual, Carry bag  
**SKU: TEMPRA**



**TEMPORARY ANCHOR 4 - PACK**

**Includes:** Carton of 4 temporary roof anchors, Fasteners, Carry bags, Owner's manual  
**SKU: TEMPRA**



**1.3M ANCHOR STRAP**

**Includes:** 1 x 1.3m Anchor strap - Tile roof Temporary fix  
**SKU: 1.3STRAP**



**GESIPA HN2 HAND RIVET GUN**

**Includes:** Nosepieces: 16/29, 16/32, 16/36, 16/40 & 16/45, Spent mandrel container, Operating manual  
**SKU: GHRG**



**TEMPORARY ROOF WORKER KIT 1**

**Includes:** 1 x Temporary anchor, Fastenings, Manual, 1 x Roofers harness, 1 x Retractable lanyard, 2x Karabiners, Carry bag  
**SKU: ROOFK1**



**TEMPORARY ROOF WORKER KIT 2**

**Includes:** 1 x Temporary anchor, Fastenings, Manual, 1 x Roofers harness, 1 x Harness rope 8m. Shock absorber, Rope grab, 1 x Karabiner, Carry bag  
**SKU: ROOFK2**



**WIRE STROP**

**Includes:** 1 X 1.3 meter Stainless Steel wire connector strop, with plastic sleeve  
**SKU: WSTROP**



**LADDER ACCESS BRACKET**

**Includes:** 1 x Ladder Bracket, Permanent fix fastenings, Users guide  
**SKU: LAB**



**GESIPA BATTERY RIVET GUN**

**Includes:** PowerBird® Pro, 18.0 Volt / 2.1 Ah (li-ion) Battery, Charger, Carry case, Nosepieces 17/32, 17/36  
**SKU: GBRG**



**COMPLIANCE PLATE**

**Includes:** 1 x Compliance plate  
**SKU: HSCP**

**ANKAme** [ankame.com.au](http://ankame.com.au)

Industry compliant and certified products  
 Adapts to metal roof sheeting & concrete  
 Complete height safety solutions  
 Simple installation method  
**Aligns to roof screw pattern and profile**

**DISCLAIMER**

By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©


## OWNERS MANUAL & CORRECT INSTALLATION

### PERMANENT FIX

(min. grade sheet thickness 0.42mm) with 1 x Bulb-tite 7.7mm x 27mm RV6605-9-6W fixed in sequence as indicated below.  
 To be installed and used by competent persons only.


### USER INSPECTION & MAINTENANCE

It is a requirement that the roof anchor be inspected prior to each use, if any of the following are evident, the roof anchor must be removed from service immediately:  
 Any defects, absent markings/ labelling, evidence of missing parts, or if the roof anchor has been used in a fall. Roof anchor not to be used in a corrosive environment. Temporary fix not to be used as a permanent fixture. Roof anchor to be used in the direction of eyebolt only. Roof anchor to be used only where roof sheeting has been fully installed in accordance with manufacturers recommendations. Roof sheeting profile can vary up to 5mm, inspect roof sheeting prior to installation of roof anchor. Roof anchor to be cleaned regularly with a damp cloth.

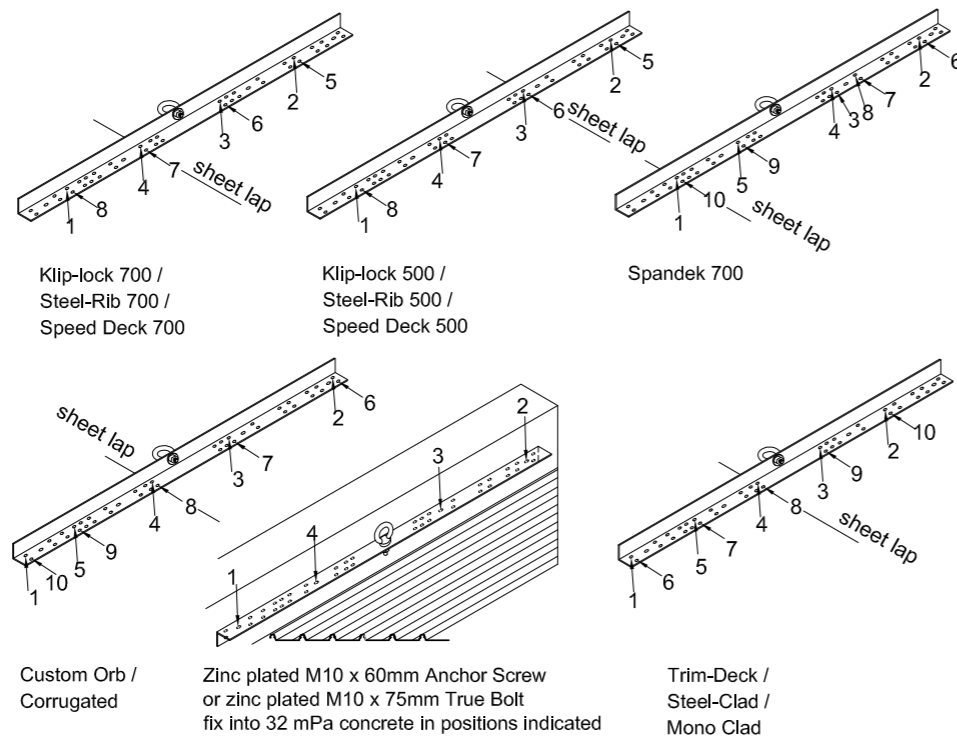

### TEMPORARY FIX

(min. grade sheet thickness 0.42mm) with 1 x Bremick 14-29 x 65mm fixed in sequence as indicated below.  
 To be installed and used by competent persons only.

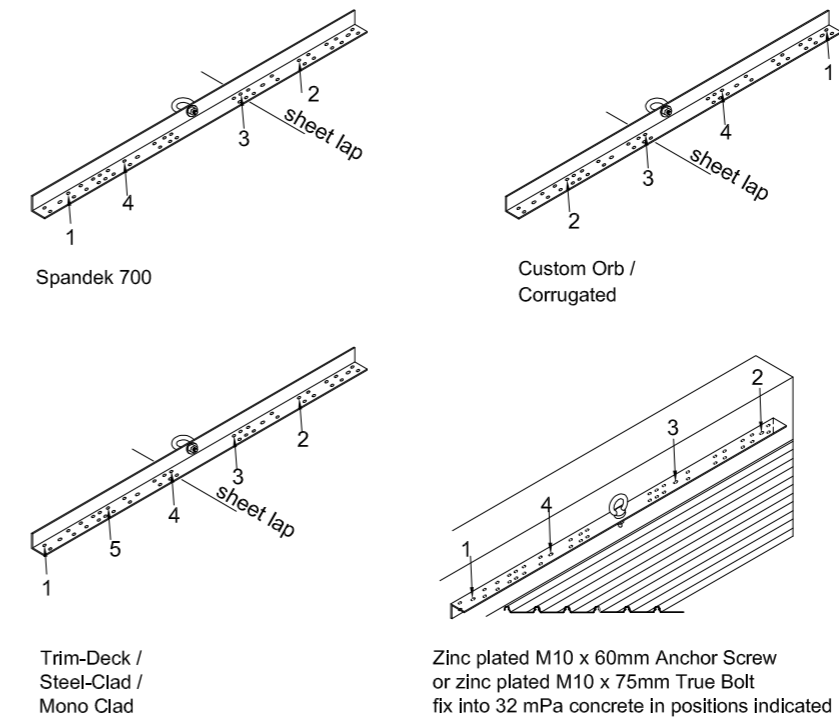

### IMPORTANT

All specified fastenings must be fixed into adequate roof structure, if adequacy of the roof structure is in doubt, the roof should be inspected and certified by a registered structural engineer. It is the responsibility of the installer and user for the correct use of the anchor. It is recommended that the roof anchor be fixed 2500mm from edge of roof and no less than 800mm from edge of roof. Other fastenings are NOT to be used with the roof anchor. Shock absorber equipment must be attached at all times. For correct use of equipment, refer to AS/NZS 1891.4: 2009, industrial fall-arrest systems and devices - selection, use and maintenance. People with any disability, impaired vision or other impaired capabilities are not to use the roof anchor. min grade of timber to be F8, min grade of steel to be G450. Temporary fix custom orb timber fix only. Some of the roof sheet profiles above may also be known as a different name but same profile this is due to the different manufactures and some roof sheet profiles can vary up to 5 mm.

ANKAme [ankame.com.au](http://ankame.com.au)


Industry compliant and certified products  
 Adapts to metal roof sheeting & concrete  
 Complete height safety solutions  
 Simple installation method  
**Aligns to roof screw pattern and profile**

### DISCLAIMER







By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©

## METAL ROOF PROFILES & CONCRETE FIX
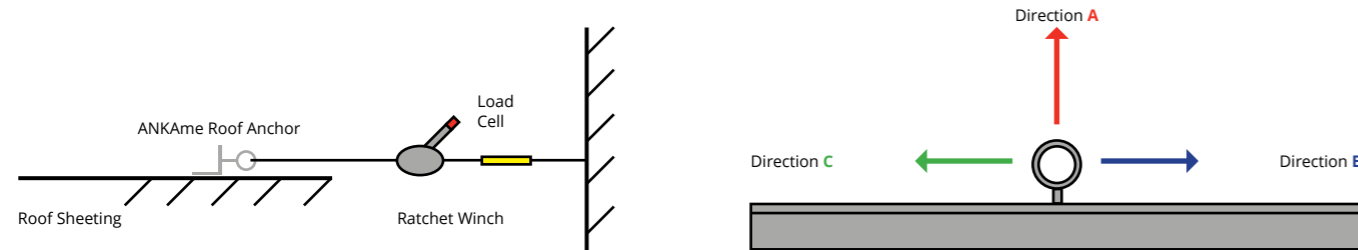
### LOAD TESTING AND ROOF SHEET PROFILES



The ANKAme roof anchor has been designed and tested to suit the following roof sheet profiles and concrete;

ROOF SHEET PROFILE	SURFACE MOUNTED APPLICATION	
Klip lock 700 	Permanent Roof Anchor	Complies
Klip lock 500 	Permanent Roof Anchor	Complies
Custom Orb 	Permanent Roof Anchor / Temporary Roof Anchor	Complies
Trim Deck 	Permanent Roof Anchor / Temporary Roof Anchor	Complies
Span Deck 	Permanent Roof Anchor / Temporary Roof Anchor	Complies
Concrete 	Permanent Roof Anchor / Temporary Roof Anchor	Complies

Roof sheet profiles above may also be known as a different names but same profile this is due to the different manufactures also some roof sheet profiles can vary up to 5mm based on both different manufactures and how the roof sheeting has been installed

### STRENGTH REQUIREMENT TEST METHOD

The ANKAme Roof Anchor was installed into roof sheeting and concrete, and proof loaded to 15kN as per AS/NZS 1891.4:2009 Clause 3.1, Table 3.1 (a) use for free fall arrest, single point anchorage for one person. Please refer to the loading diagram above.

## COMPLIANT & CERTIFIED PRODUCT

**Complies with:**  
 AS/NZS 1891.4: 2009  
 Single Point Anchorage (15Kn)

**Complies with:**  
 AS/NZS 1891.2: Supplement 1:2001  
 Static Line Use (15Kn)



Temporary Roof Anchor



Permanent Roof Anchor

ANKAme roof anchor can be used for many different jobs and has many different applications.

- Roof installation
- Replacement roofing
- Roof painting
- Roof repairs
- Roof maintenance
- Roof penetrations
- Gutter guard installation
- Solar panel installations
- Aerial installations
- Gutter/roof cleaning
- Residential use
- Industrial/commercial use
- Ladder footing
- Roof footing
- Concrete fix abseiling from multi-story buildings, window cleaning and building maintenance

ANKAme [ankame.com.au](http://ankame.com.au)

Industry compliant and certified products  
 Adapts to metal roof sheeting & concrete  
 Complete height safety solutions  
 Simple installation method  
**Aligns to roof screw pattern and profile**

### DISCLAIMER

By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©



**CERTIFICATE  
 OF TEST REPORT**

**WorkCover**  
 NEW SOUTH WALES

File No: 2010/011507  
 Job No: M14691

28 July 2010

ANKAme Pty Ltd  
 PO Box 232  
 ROSNY PARK 7018 TASMANIA

Attention: Johnathon Newitt


Dear Johnathon,

**RE: RESULTS OF TESTING**

As per your request, the following is a summary of the results from testing performed at your site from the 28/06/2010 to 01/07/2010 on your ANKAme Multi-function Anchors:

**Strength Requirement Test Method:**  
 The ANKAme Roof Anchor was installed into roof sheeting and concrete, and proof loaded to 15kN as per AS/NZS 1891.4:2009 Clause 3.1, Table 3.1 (a) use for free fall arrest, single point anchorage for one person. Please refer to the table and the directional loading diagram attached to this letter for the result of each test.

For further details refer to our test report No. 32470.

Yours Faithfully,  
  
 Jana Zeman  
 Engineer, Testing Services Branch  
 Test Safe Australia

Test Safe Australia is part of WorkCover NSW ABN 77 682 742 966 919 Londonderry Road Londonderry NSW 2753 Australia  
 PO Box 592 Richmond NSW 2753 Australia Telephone +61 2 4724 4900 Facsimile +61 2 4724 4999  
 Email testsafe@workcover.nsw.gov.au  
 GROUP 1 TestSafe/Common Data/LET/TEC/270710a.doc Page 1 of 3

**WorkCover**  
 NEW SOUTH WALES

Results of Testing to AS1891.4:2009:

Installed on to:	Fixtures Used:	Direction A Load kN	Direction B Load kN	Direction C Load kN	Comments	Results
Klip-Lok 700 0.42mm thickness	7.7 mm Bulb-tite RV6605-9-6W	15	15	15	Load held for 2 min 30 sec	Complies
Klip-Lok 700 0.42mm thickness	Fab-Lok EZJ120	15	15	15	Load held for 2 min 30 sec	Complies
Klip-Lok 500 0.42mm thickness	7.7 mm Bulb-tite RV6605-9-6W	15	15	15	Load held for 2 min 30 sec	Complies
Klip-Lok 500 0.42mm thickness	Fab-Lok EZJ120	15	15	Not Tested	Load held for 2 min 30 sec	Complies
Spandek/Timber Grade F8 Timber	Bremick Screws 14-20 x 65	15	15	15	Load held for 2 min 30 sec	Complies
Spandek 0.42mm thickness	7.7 mm Bulb-tite RV6605-9-6W	15	15	15	Load held for 2 min 30 sec	Complies
Spandek 0.42mm thickness	Fab-Lok EZJ120	15	15	15	Load held for 2 min 30 sec	Complies
Custom Orb/Timber Grade F8 Timber	Bremick Screws 14-20 x 65	15	15	15	Load held for 2 min 30 sec	Complies
Custom Orb/ Steel Purlin Grade G450 Purlin	Bremick Screws 14-20 x 65	Not Tested	15	15	Load held for 2 min 30 sec	Complies
Custom Orb 0.42mm thickness	7.7 mm Bulb-tite RV6605-9-6W	15	15	15	Load held for 2 min 30 sec	Complies
Custom Orb 0.42mm thickness	Fab-Lok EZJ120	15	15	15	Load held for 2 min 30 sec	Complies
Steel-Clad/Timber Grade F8 Timber	Bremick Screws 14-20 x 65	15	15	15	Load held for 2 min 30 sec	Complies
Steel-Clad/ Steel Purlin Grade G450 Purlin	Bremick Screws 14-20 x 65	15	15	15	Load held for 2 min 30 sec	Complies
Steel-Clad 0.42mm thickness	7.7 mm Bulb-tite RV6605-9-6W	15	15	15	Load held for 2 min 30 sec	Complies
Steel-Clad 0.42mm thickness	Fab-Lok EZJ120	15	15	15	Load held for 2 min 30 sec	Complies
Concrete	M10 Trubolt	15	Not Tested	Not Tested	Load held for 2 min 30 sec	Complies
Concrete	M10 Anchor Screw	15	Not Tested	Not Tested	Load held for 2 min 30 sec	Complies


Test Safe Australia is part of WorkCover NSW ABN 77 682 742 966 919 Londonderry Road Londonderry NSW 2753 Australia  
 PO Box 592 Richmond NSW 2753 Australia Telephone +61 2 4724 4900 Facsimile +61 2 4724 4999  
 Email testsafe@workcover.nsw.gov.au  
 GROUP 1 TestSafe/Common Data/LET/TEC/270710a.doc Page 2 of 3

**CERTIFICATE  
 OF COMPLIANCE**

**Certificate of Compliance**  
 This is to certify that the ANKAme roof anchor has been witness tested by a NATA accredited testing Authority for testing roof anchors (Test Safe Australia) Test report no. 32470

**DIRECTIONAL LOAD TESTING OF SINGLE POINT ANCHORAGES TO AS/NZS 1891.4:2009**

Load sell testing set up Load sell directional testing to 15kN

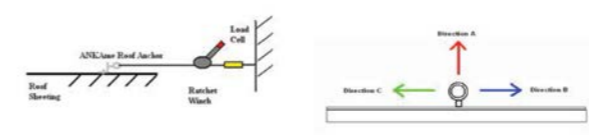

The ANKAme roof anchor has been designed and tested to suite the following roof sheet profiles and concrete:

(Roof sheet profile) (Surface mounted application)

- Klip lock 700 Permanent fix application (complies)
- Klip lock 500 Permanent fix application (complies)
- Custom Orb Permanent fix application / Temporary fix application (complies)
- Trim Deck Permanent fix application / Temporary fix application (complies)
- Spandek Permanent fix application / Temporary fix application (complies)
- Concrete Permanent fix application / Temporary fix application (complies)


Some of the roof sheet profiles above may also be known as a different name but same profile this is due to the different manufactures and some roof sheet profiles can vary up to 5 mm.

**Strength Requirement Test Method:**  
 The ANKAme Roof Anchor was installed into roof sheeting and concrete, and proof loaded to 15kN as per AS/NZS 1891.4:2009 Clause 3.1, Table 3.1 (a) use for free fall arrest, single point anchorage for one person. Please refer to the loading diagram above.

**WARNING; this roof anchor is to be installed and used by competent and confident persons only, as per the owner's manual correct installation instructions.**

**STATIC  
 LINE USE**

**IF IN DOUBT, ASK!**

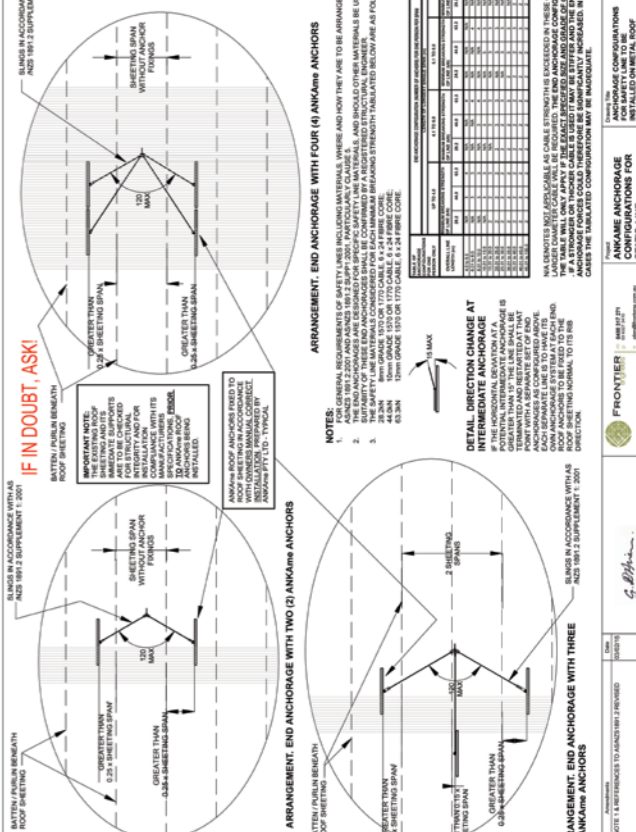

**NOTES:**

- ANCHORING REQUIREMENTS FOR THE ANKAme ROOF ANCHOR ARE TO BE ARRANGED REFER TO AS/NZS 1891.4:2009 AND AS/NZS 1891.2:2001 PARTICULARLY CLAUSE 3.1.
- INSTALLATION OF THE ANKAme ROOF ANCHOR SHALL BE COMPLETED BY A REGISTERED STRUCTURAL ENGINEER.
- INSTALLATION OF THE ANKAme ROOF ANCHOR SHALL BE COMPLETED BY A REGISTERED STRUCTURAL ENGINEER.

**DETAIL DIRECTION CHANGE AT INTERMEDIATE ANCHORAGE**  
 POSITIVE INTERNAL ANCHORAGE IS REQUIRED TO BE INSTALLED AT EACH END OF THE ANCHORAGE TO BE USED FOR STATIC LINE USE.

**ARRANGEMENT, END ANCHORAGE WITH FOUR (4) ANKAme ANCHORS**

**ARRANGEMENT, END ANCHORAGE WITH TWO (2) ANKAme ANCHORS**

**ARRANGEMENT, END ANCHORAGE WITH THREE (3) ANKAme ANCHORS**

Test Safe Australia is part of WorkCover NSW ABN 77 682 742 966 919 Londonderry Road Londonderry NSW 2753 Australia  
 PO Box 592 Richmond NSW 2753 Australia Telephone +61 2 4724 4900 Facsimile +61 2 4724 4999  
 Email testsafe@workcover.nsw.gov.au  
 GROUP 1 TestSafe/Common Data/LET/TEC/270710a.doc Page 2 of 3

## FAQ'S

### What roofs can ANKAme be installed on?

The Temporary and Permanent ANKAme roof anchors are the ONLY roof anchors in Australia that align to all common roof screw Pattern & Profile and that have been tested by a NATA accredited company.

### What is the difference between ANKAme Roof Anchors and other roof anchors?

The ANKAme roof anchor complies with current Australian Standards AS/NZS 1891.4:2009 and is a compliant and certified Product, tested by a NATA accredited testing company. Most other products are not certified or only comply with parts of the Australian Standards and sometimes are only tested by the manufacturer making them non-compliant with Australian Standards. The ANKAme roof anchor can be installed on 9 different roof profiles but has up to 14 different applications.

### Who is able to install ANKAme Roof Anchors?

The end user and installer need to be able to deem themselves competent or have contacted a competent installer. As per AS/NZS 1891.4:2009

### How often is re-certification required for the ANKAme Roof Anchor?

The temporary anchor does not require any further testing or re-certification once purchased. It is recommend that the screw fastenings be replaced every 3 months. The permanent fix anchors once installed need to be re-certified by a competent person every 12 months as per the Australian Standards.

### What fastenings are required for Timber, Steel & Concrete?

The Bremick 14-20 X 65mm screw is to be used only for the temporary fix (both steel batten and timber batten) This is the only screw that can be used with the temporary anchor because this is the specific fastening used during testing.

### Timber & Steel Temporary Fastening

(Metal Roofs)

Timber purlins / Steel purlins, timber-fastener




### Steel Permanent Fastening

(Metal Roofs)




### Concrete Fastening

M10 x 75mm AnkaScrew



### Concrete Fastening

M10 x 75mm True Bolt



### How do I install the ANKAme?

Place the ANKAme into position and refer to the owner's manual for the correct procedure and installation guide.

### Can the ANKAme Roof Anchor be painted a different colour?

No. The Temporary comes as Hi Visible Orange and the Permanent Gull grey.

### Can ANKAme be used on Polycarbonate roofs?

No.

### Where can I get a copy of the Safe Work Australia Code of Practice?

Go to the web site

<https://www.safeworkaustralia.gov.au/heights>

Additional documents are available from the website that detail the processes for managing working -at-height risk for specific industries.

### Is ANKAme owned and operated in Australia?

Yes the ANKAme products are proudly owned and operated in Australia.

### Does the ANKAme Roof Anchor come with a warranty?

No.

In the case of a fall the ANKAme product can no longer be used.


#### DISCLAIMER

By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©





**TEMPORARY ROOF ANCHOR ADAPTS TO**  
 Custom Orb, Trimdeck, Spandek & Concrete Fix

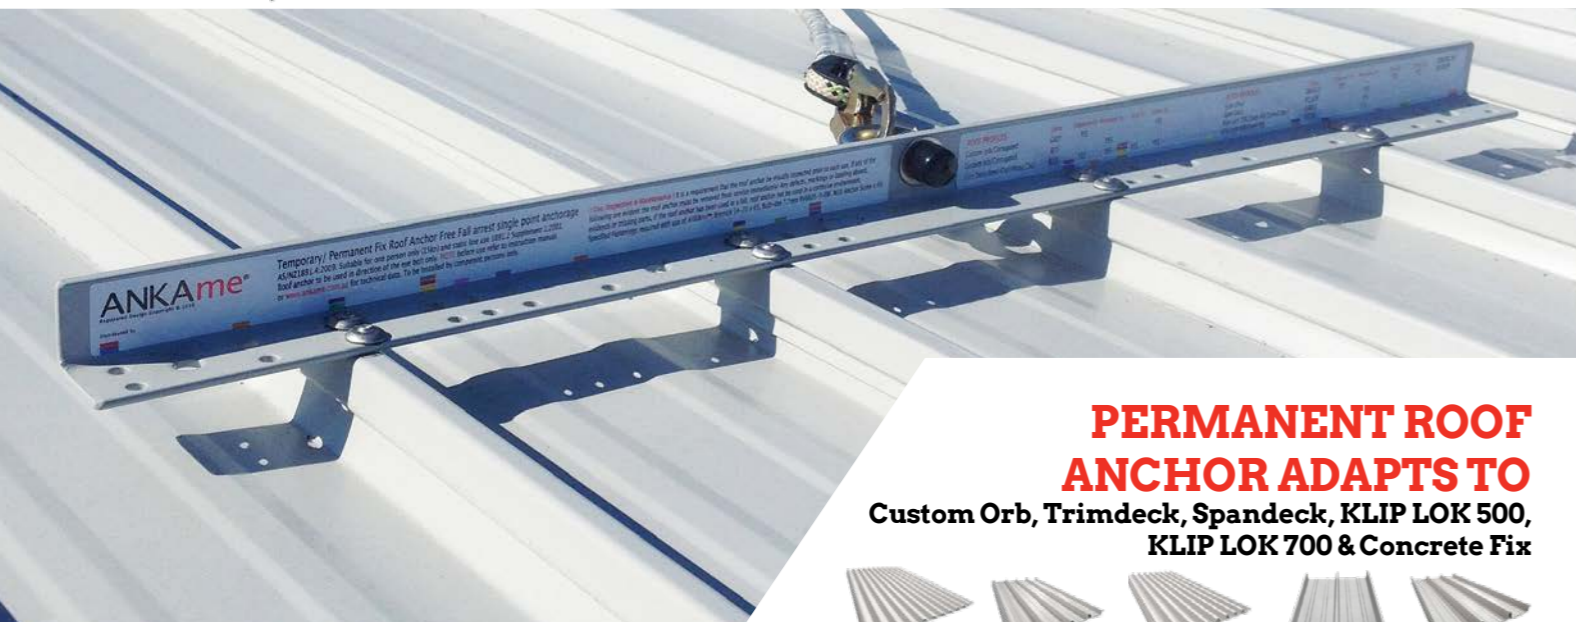

**PERMANENT ROOF ANCHOR ADAPTS TO**  
 Custom Orb, Trimdeck, Spandek, KLIP LOK 500,  
 KLIP LOK 700 & Concrete Fix




**ROOF ANCHOR KEY FEATURES**

- ✓ Temporary & permanent applications.
- ✓ Compliant & certified product to AS/NZS 1891.4:2009.
- ✓ Aligns to roof screw pattern and profile.
- ✓ Comes with fastenings and user manual.
- ✓ Light weight & durable, (3kg).

- ✓ Adapts to metal roof sheeting & concrete fix.
- ✓ Surface mountable.
- ✓ Quick & easy install, colour coded installation instructions on roof anchor, with QR coded user guide.
- ✓ Installed by any competent person.

**TEMPORARY & PERMANENT ACCESS LADDER BRACKET**

Used for safe ladder access to roofs and against walls.

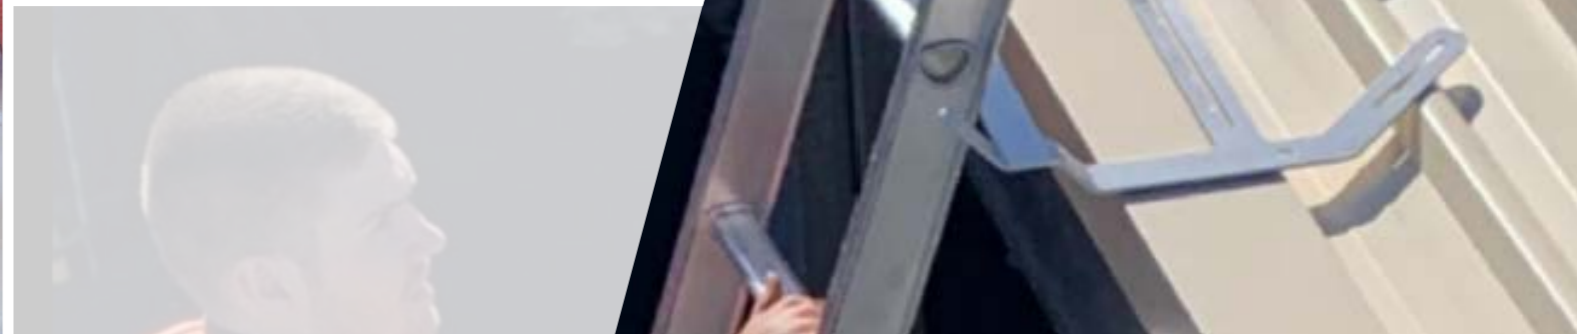


**FOR FIXING TO METAL**

**PERMANENT fix onto METAL**

For roof or wall mounting, a minimum of 4 12x25mm roof screws with neoprene washer must be used for the permanent fix installation onto metal material, as shown in FIG 1.A


Comes with permanent fixings.

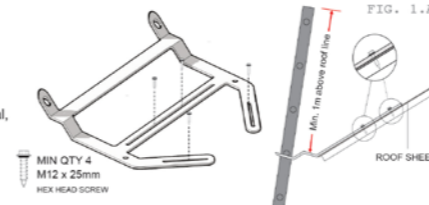

**TEMPORARY fix onto METAL**

For roof or wall mounting, a minimum of 2 12x50mm roof screws with neoprene washer are used for the temporary fix installation onto metal roofs or walls as shown in FIG 2.A.


All screws must penetrate into timber or steel structure below roof sheeting, as shown. Temporary fixings to be used from existing roof. Temporary fix application is not suitable for Permanent fix application.

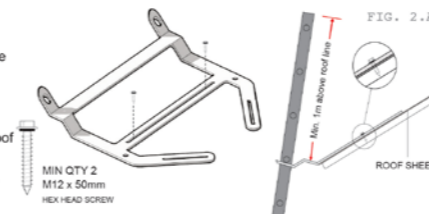

**FOR FIXING TO CONCRETE or MASONRY**

**TEMPORARY or PERMANENT fix onto CONCRETE or MASONRY**

For wall mounting, a minimum of 2 8x50mm anchor bolts are used for the permanent fix installation onto concrete roofs or walls, as shown as shown in FIG 3.A

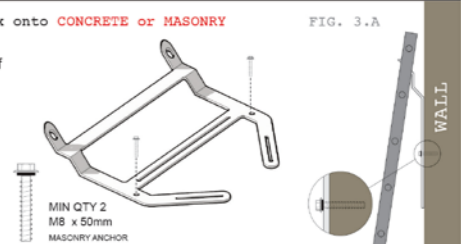

If in doubt about installation methods, visit [www.ankame.com.au](http://www.ankame.com.au) or scan this QR code to access our online information and technical specifications.

**LADDER ACCESS BRACKET KEY FEATURES**

- ✓ Temporary & permanent use.
- ✓ Compliant & certified product to AS/NZS 1657:2018.
- ✓ Aligns to roof screw pattern and profile.
- ✓ Comes with permanent fastenings and user manual.
- ✓ Light weight & durable, (1kg).
- ✓ Adapts to all common metal roof sheet profiles & concrete fix.

- ✓ Fits up and over most common gutters.
- ✓ Surface mountable & made from Hi-grade aluminium.
- ✓ Quick & easy install, instructions on roof anchor, with QR coded user guide.
- ✓ Installed by any competent person.

ANKAme [ankame.com.au](http://ankame.com.au)

Industry compliant and certified products  
 Adapts to metal roof sheeting & concrete  
 Complete height safety solutions  
 Simple installation method  
 Aligns to roof screw pattern and profile

**DISCLAIMER**

By purchasing this ANKAme product you are deemed to be a competent installer, or have contacted a competent installer, as the manufacturer and seller take no responsibility for the misuse of the products. Refer to owners manual installation instructions for the correct use of these items. Copyright, all rights reserved ANKAme 2020 ©



**ANKAme.com.au**

PERMANENT & TEMPORARY ROOF ANCHORS  
+ OTHER HEIGHT SAFETY EQUIPMENT



Proudly Distributed by



The safer, smarter  
height safety solution

**ANKAme.com.au**

**Temporary Roof Anchor Adapts to**  
Custom Orb, Trimdeck, Spandek, & Concrete Fix

